



RT 690 (6V9.0Ah)

RT 690 is a general purpose battery with 5 years floating design life, meet with IEC, JIS standard. With heavy duty grid, thickness plates, special additives, RT series battery have long and reliable standby service life.



Specification

Cells Per Unit	3
Voltage Per Unit	6
Capacity	9.0Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 1.35 Kg
Max. Discharge Current	90 A (5 sec)
Internal Resistance	Approx. 9 mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	6.8 to 6.9 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	2.7 A
Equalization and Cycle Service	7.2 to 7.5 VDC/unit Average at 25°C
Self Discharge	RITAR batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Faston Tab 187(F1)/Faston Tab 250(F2)
Constainer Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V2 can be available upon request.



MH28539




G4M20206-0910-E-16




ISO9001:2000 Certificate

Dimensions




Unit: mm Dimension: 151(L)×34(W)×94(H)

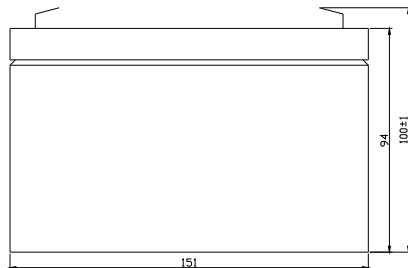

Terminal F1



Terminal F2



Constant Current Discharge Characteristics : A(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	35.550	23.760	18.270	10.557	6.2460	3.2557	2.3040	1.8900	1.5666	1.0391	0.8996	0.5049
5.00V	34.266	22.835	17.684	10.395	6.2100	3.2322	2.2950	1.8810	1.5574	1.0350	0.8905	0.4865
5.10V	32.414	22.129	17.278	10.314	6.1650	3.2243	2.2860	1.8720	1.5481	1.0309	0.8813	0.4774
5.25V	29.282	20.709	16.379	10.080	6.0750	3.1852	2.2770	1.8630	1.5388	1.0267	0.8721	0.4590
5.40V	26.151	19.298	15.470	9.8370	5.9850	3.1304	2.2590	1.8540	1.5296	1.0226	0.8537	0.4406
5.55V	23.047	17.878	14.571	9.5940	5.9040	3.0835	2.2410	1.8450	1.5203	1.0184	0.8446	0.4315

Constant Power Discharge Characteristics : W(25°C)


F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
4.80V	194.4	126.4	102.7	63.34	37.45	19.51	13.80	11.29	11.04	6.25	5.32	2.97
5.00V	189.3	126.2	101.2	62.32	37.34	19.39	13.77	11.26	10.96	6.20	5.26	2.86
5.10V	185.6	122.4	98.88	61.91	37.26	19.35	13.74	11.26	10.93	6.19	5.21	2.81
5.25V	167.7	117.4	93.73	60.43	36.64	19.04	13.66	11.18	10.90	6.17	5.15	2.70
5.40V	149.8	109.8	88.56	59.00	36.02	18.78	13.55	11.10	10.87	6.15	5.07	2.62
5.55V	131.9	102.2	83.41	57.56	35.40	18.50	13.45	11.02	10.85	6.15	4.99	2.54

All mentioned values are average values.

Effect of temperature on long term float life

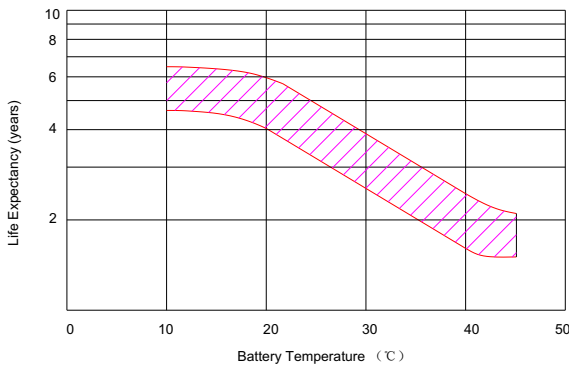

Storage characteristic

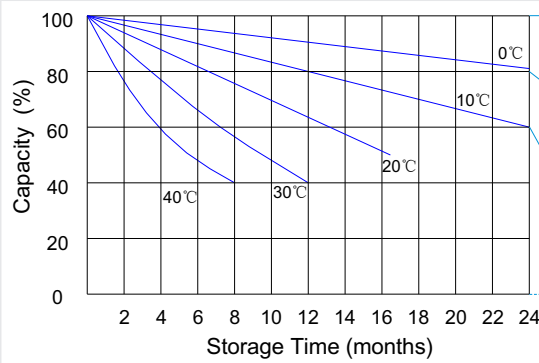


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is requires)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

Charge characteristic Curve for standby use

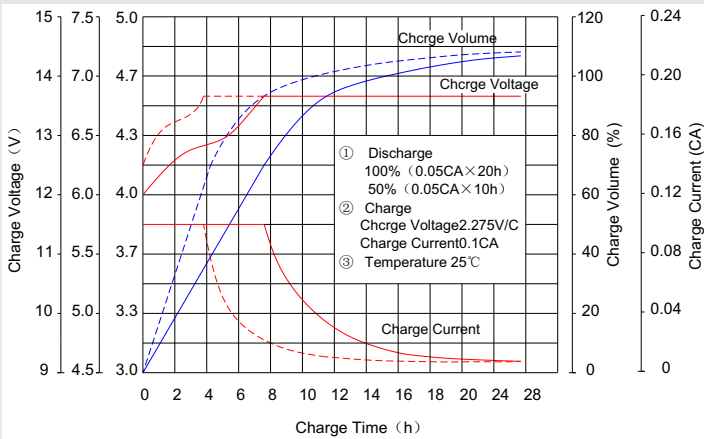

Discharge characteristic Curve

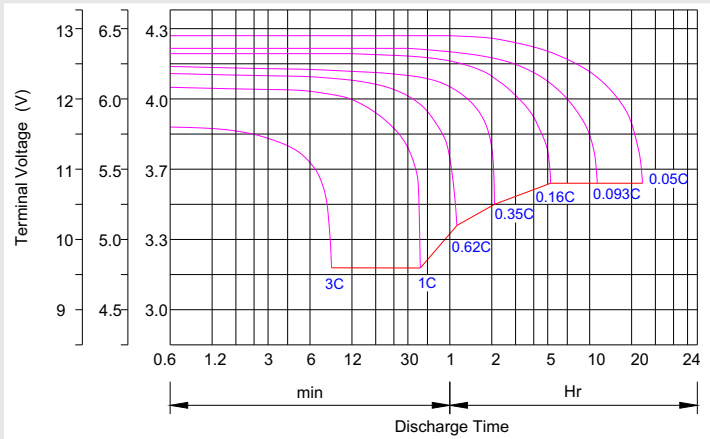

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	2V	50%	70%	74%	80%	88%	98%	100%	102%	104%	105%
	6V&12V	60%	75%	80%	85%	90%	98%	100%	103%	105%	106%
AGM Battery	2V	46%	66%	70%	80%	90%	99%	100%	103%	107%	109%
	6V&12V	55%	70%	76%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Float Service:
※ Every month, recommend inspection every battery voltage.
※ Every three months, recommend equalization charge for one time.
Equalization charge method:
Discharge: 100% rate capacity discharge.
Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.
※ Effect of temperature on float charge voltage: -3mV/°C/Cell.
※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx 12h
Fast	-0.2Cx2h+0.3CAx4.0h